ELECTRICAL

Page 160

Page 161

Page 164

Page 168

Page 170

Page 175

Page 177

Page 178

Page 184

VOLTEC INDUSTRIES

Arctic Extension Cords
ALL-Flex™

Weather, oil and water resistant jacket and insulation. Quick Check® power indicator lighted end. Stays flexible in extreme conditions. 125V Rated. For indoor and outdoor use. UL listed. NEMA code 5-15 compliant.

Mfg. No.	Order No.	Color	Lgth. Ft.	Rating
		16 AWG		
05-00134	VOL00134	Blue	15	13A/1625W
05-00135	VOL00135	Blue	25	13A/1625W
05-00136	VOL00136	Blue	50	13A/1625W
05-00137	VOL00137	Blue	100	10A/1250W
		14 AWG		
05-00361	VOL00361	Blue	25	15A/1875W
05-00362	VOL00362	Blue	50	15A/1875W
05-00363	VOL00363	Blue	100	13A/1625W
		12 AWG Heavy Duty		
05-00358	VOL00358	Blue	25	15A/1875W
05-00359	VOL00359	Blue/Red	50	15A/1875W
05-00360	VOL00360	Blue/Red	100	15A/1875W
		10 AWG Heavy Duty		
05-00356	VOL00356	Blue	50	15A/1875W
05-00357	VOL00357	Blue	100	15A/1875W

Extension Cords

Flexible, all-weather cords. UL listed. NEMA code 5-15 compliant.

Mfg. No.	Order No.	Lgth. Ft.	Rating
	16 AWG – Orange		
05-00108	VOL00108	25	13A/1625W
05-00109	VOL00109	50	13A/1625W
05-00110	VOL00110	100	10A/1250W
	14 AWG – Orange w/ Black Stripe		
05-00341	VOL00341	25	15A/1875W
05-00342	VOL00342	50	15A/1875W
05-00343	VOL00343	100	13A/1625W
	12 AWG – Yellow		
05-00347	VOL00347	25	15A/1875W
05-00124	VOL00348	50	15A/1875W
05-00125	VOL00125	100	15A/1875W
	10 AWG – Yellow w/ Black Stripe		
05-00351	VOL00351	100	15A/1875W

VOLTEC INDUSTRIES

Extension Cords
3-Outlet



Three-conductor 300V power block extension cord. 14/3 gauge wire. 15 amps, 1875 watts.

Mfg. No.	Order No.	Lgth. Ft.
05-00120	VOL00120	25

Extension Cords
Tuf-Flex® — 3-Outlet

Weather, oil and water resistant jacket and insulation. Quick Check® power indicator lighted end. Stays flexible in extreme conditions. 12 AWG cable. Rated for use up to 15A, 1875W at 125V AC. For indoor and outdoor use. UL listed. NEMA code 5-15 compliant.

Mfg. No.	Order No.	Lgth. Ft.
05-00148	VOL00148	50
05-00149	VOL00149	100

Extension Cords
Indoor — 3-Outlet

16 AWG. Rated for use up to 13A/125V/625W. UL listed. NEMA 1-15 compliant.

Mfg. No.	Order No.	Lgth. Ft.	Color
01-00001	VOL00001	6	Brown
01-00002	VOL00002	6	White
01-00003	VOL00003	9	Brown
01-00004	VOL00004	9	White
01-00005	VOL00005	12	Brown
01-00006	VOL00006	12	White

Power Block Adapters
All Flex® — 3-Outlet

VOL00089

All weather extension cord adapter with lighted power block. 15 amps, 1875 watts.

Mfg. No.	Order No.	Size/No. Cond.	Lgth. Ft.	Cord Color
04-00088	VOL00088	14/3	1	Orange
04-00089	VOL00089	12/3	2	Blue

VOLTEC INDUSTRIES

GFCI Adapters

VOL00101

VOL00102

VOL00101: Right angle, SJTW with power block. Rated 125V, 15A. UL listed. Blue w/ yellow stripe.
VOL00102: Manual reset GFCI with test function. Power indicator light. Rated 125V, 20A. UL Listed. Blue.

Mfg. No.	Order No.	Size/ No. Cond.	Lgth. Ft.
04-00101	VOL00101	12/3	2
04-00102	VOL00102	12/3	2

Adapters & Accessories
600V

U-Ground "W" adapter. Rated 125V, 15A. Blue/yellow. UL and CUL listed.

Mfg. No.	Order No.	Size/ No. Cond.	Size In.
04-00096	VOL00096	12/3	20

Y-Adapters

12/3 heavy duty, STW wire type, y-adapter converts a 5-15 outlet into two U-ground 5-15 outlets. Double thick jacket rated for outdoor use. For use in temperatures from -40° to 140°F. Compatible with variety of portable tools. 15A, 600V capacity.

Mfg. No.	Order No.	Lgth. Ft.
04-00094	VOL00094	2

K&H INDUSTRIES, INC.

Plugs and Connectors
Nylon

Two-pole, three-wire, grounded straight blade design. 15A. 125V AC. Measures 1.5" W x 1.5" D. Safety yellow color.

Mfg. No.	Order No.	Desc.	Blade Config.
4867	CPR4867	Plug	NEMA 5-15P
4887	CPR4887	Connector	NEMA 5-15C

BRYANT®

Locking Devices
Tech-Spec® — 20 Amp

Two-pole, three-wire grounding locking device. Nylon case, double-wall construction. Internal Triple-Gripper cord grip. UL listed, CSA certified. Complies with NEMA and Federal specifications.

Mfg. No.	Order No.	Desc.	Blade Config.
		125V	
70520NP	BRY70520NP	Plug	NEMA L5-20
70520NC	BRY70520NC	Connector	NEMA L5-20
		250V	
70620NP	BRY70620NP	Plug	NEMA L6-20
70620NC	BRY70620NC	Connector	NEMA L6-20

Locking Devices
Tech-Spec® — 30 Amp

BRY70630NP

BRY70630NC

Two-pole, three-wire grounding locking device. Nylon case, double-wall construction. Internal Triple-Gripper cord grip. UL listed, CSA certified. Complies with NEMA and Federal specifications.

Mfg. No.	Order No.	Desc.	Blade Config.
		125V	
70530NP	BRY70530NP	Plug	NEMA L5-30
70530NC	BRY70530NC	Connector	NEMA L5-30
		250V	
70630NP	BRY70630NP	Plug	NEMA L6-30
70630NC	BRY70630NC	Connector	NEMA L6-30

BRYANT®

Locking Devices
Tech-Spec® — 20 Amp

BRY7142NP

BRY7142NC

Three-pole, four-wire, 125/250V locking device. Nylon case, double-wall construction. Internal Triple-Gripper cord grip. UL listed, CSA certified. Complies with NEMA and Federal specifications.

Mfg. No.	Order No.	Desc	Blade Config.
71420NP	BRY71420NP	Plug	NEMA L14-20
71420NC	BRY71420NC	Connector	NEMA L14-20
71430NP	BRY71430NP	Plug	NEMA L14-30
71430NC	BRY71430NC	Connector	NEMA L14-30

Straight Blade Devices
Tech-Spec® — 15 Amp

BRY5266NP

BRY5269NC

Two-pole, three-wire. Nylon case with automatic cord grip. Transparent terminal cover for easy visual inspection. Clamp-type terminals. UL listed, CSA certified. Complies with NEMA and Federal specifications.

Mfg. No.	Order No.	Desc.	Blade Config.
		125V	
5266NP	BRY5266NP	Plug	NEMA 5-15
5269N	BRY5269NC	Connector	NEMA 5-15
		250V	
5666MA	BRY5666MA	Plug	NEMA 6-15
5669MA	BRY5669MA	Connector	NEMA 6-15

BRYANT®

Straight Blade Devices
Tech-Spec® — 20 Amp

BRY5366N

BRY5369N

Two-pole, three-wire, 125V. Black/white nylon case with automatic cord grip. Double-wall construction with a transparent terminal cover with clear window and teardrop wiring pockets. Ratings stamped on straight blade devices visible while in use. UL listed, CSA certified. Complies with NEMA and Federal specifications.

Mfg. No.	Order No.	Desc.	Blade Config.
5366N	BRY5366N	Plug	NEMA 5-20
5369N	BRY5369N	Connector	NEMA 5-20

CEP CONSTRUCTION ELECTRICAL PRODUCTS

Power Distribution Centers
Temporary — Portable

Metal housing and legs. Features GFCI grounding; 50A, 125/250V supply inlet and outlet; 30A, 240V locking receptacle; six 20A locking outlets with circuit breaker protection, and clear porthole panel for viewing breakers. Yellow. Meets UL, CSA, and OSHA requirements.

Mfg. No.	Order No.	Desc.
CEP6506GU	CEP6506GU	Power distribution center

Power Cords
SOW

Provides 50A power flow to construction sites and similar applications. 125/150V connectors. Black.

Mfg. No.	Order No.	Lgth. Ft.
CEP6425M	CEP6425M	25
CEP6450M	CEP6450M	50
CEP6400M	CEP6400M	100

Electrical

CEP CONSTRUCTION ELECTRICAL PRODUCTS

Y-Adapters

CEP6404M

Pre-assembled with CS6365 plug and two CS6364 connectors.

Mfg. No.	Order No.	Desc.	Lgth. Ft.
6404M	CEP6404M	Y-Adapter	2
6405M	CEP6405M	Straight	5

Power Outlets
Wall-Mounted — 50 Amp

Power outlet in weatherproof box. Includes lift cover and 21" leads. NEMA rating: 3R Weatherproof.

Mfg. No.	Order No.	Volts
SR50	CEPSR50	125/250

Wiring Devices
50 Amp

125/250V, ribbed, thick wall nylon housing for secure gripping. Can be used with Weather-proof cover for superior seal. Complies with UL & CSA requirements

Mfg. No.	Order No.	Desc.
6365M	CEP6365M	Male Plug
6364M	CEP6364M	Female Cornector

The Designers Edge

Power Strips
Heavy Duty

15 amp overload breaker protects power tools against burnout. 14/3 grounded cor d, three transformer spaced outlets and five regular outlets. Ends of power strip hold cord for convenient storage. Heavy duty steel construction. UL & CUL listed.

Mfg. No.	Order No.	Cord Lgth. Ft.
L-816	DEGL816	6

Power Strips
Workshop — 4-Outlet

Features metal housing, lighted switch and circuit breaker. Black.

Mfg. No.	Order No.	Amps	Watts	Cord Lgth. Ft.
L-814	DEGL814	15	1875	6

CCI

Multiple Outlet Strips

Features six outlets with safety covers. 15A, 1875 Watts. White.

Mfg. No.	Order No.	Cord Lgth. Ft.
04616	CLM04616	4
041402	CLM04681	8

Surge Protectors
General Purpose

15A, 1875 watts. Includes alarm and EMI/RFI filters. Automatically shuts off during major spike. UL listed.

Mfg. No.	Order No.	No. Outlets	Joules	Ctn. Qty.
041453	CLM04638	6	900	8

CCI

Surge Protectors
Smart Strip®

Combines surge protection with automatic power control. Automatically turns off power to printers, DVD players, and other electronics when not in use, saving electricity and money. With 2250 joules and transformer spaced outlets.

Mfg. No.	Order No.	No. Outlets	Cord Lgth. Ft.
04949	CLM04949	6	3

PRIME®

Surge Protectors
General Purpose

Metal construction. Provides six extra power outlets for home electronics. 1150 joules. Automatically shuts off during major spikes. 15A, 1875 watts. Black. Includes alarm and EMI/RFI filters. UL listed.

Mfg. No.	Order No.	Cord Lgth. Ft.
PB802135	PRI002135	15

CCI

Timer Power Strips
8-Outlet

With mechanical timer and Never Lose pins. Use with computers, gaming consoles, televisons and lamps. Ratings: 125V, 1875W. 48 cycles per day. For indoor use.

Mfg. No.	Order No.	Amps	Cord Lgth. Ft.
22575	CLM22575	15	4

Indoor Mechanical Timers
24-Hour

3-C with Never Lose pins. 48 different settings per day are available. Ratings: 125V, 15A, 1875W resistive; 125V, 10A, 1250W tungsten, TV-4, 1/3 HP.

Mfg. No.	Order No.	AC Volts
59366	CLM59366	125

CCI

Outdoor Mechanical Timers
24-Hour

48 different settings per day are available to turn lights and appliances on and off at the same time every day. 14/3 SJTW cord. Features Never Lose pins that will stay in place and three-conductor GFCI protected outlet. Ratings: 125V, 15A, 1875W; resistive — 125V, 10A, 1250W; tungsten — 125V, 10A, 1250W; tungsten — TV-4, 1/3HP.

Mfg. No.	Order No.	Cord Lgth. In.	AC Volts
59204	CLM59204	8	125

Outdoor Digital Timers
7 Day

Controls outdoor landscape, security and holiday lighting. Up to 20 on/off settings per day, repeats weekly. With to-the-minute digital settings, countdown function and random setting. Compatible with compact fluorescent lighting and LED bulbs. CSA certified.

Mfg. No.	Order No.	Cord Lgth. In.	AC Volts
50015	CLM50015	12	125

SATCO

Outlet Adapters
3-to-2 — Plug-it®

Converts three-conductor 15A, 125V U-ground plug (NEMA 5-15R) to two-conductor polarized plug (NEMA 5-15P). Two per pkg. Gray.

Mfg. No.	Order No.	No. Recp.	Amps	Watts
S70-577	SATS70577	1	15	1875

CCI

Grounded Adapters
3-Outlet

CLM0794B

CLM4327C

15A/125V/1875W rating. UL and CSA approved. NEMA 5-15 compliant.

Mfg. No.	Order No.	Desc.
0794B	CLM0794B	Beige, general purpose indoor use
4327C	CLM4327C	Clear w/ LED power indicator

Surge Protectors
6-Outlet

15 Amps, 1875 watts. White.

Mfg. No.	Order No.	Joules	Desc.
04612	CLM04612	840	Surge tap w/ safety covers

VOLTEC INDUSTRIES

Cord Reels
Retractable

For wall, ceiling or bench mounting. Features four locking positions, carrying handle and three-outlet power block. Yellow. 13A, 1625W. NEMA 5-15P plug; 5-15R receptacles. UL and CUL listed.

Mfg. No.	Order No.	Cord Lgth. Ft.
07-00284	VOL00284	50

VOLTEC INDUSTRIES

Cord Reels
Retract-O-Matic™

Cord reel with Cord-Lock™ feature. Orange 16/3 cable with retractable cord reel. 10A/125V/1250W rating. NEMA 5-15 compliant. Max. 75W bulb.

Mfg. No.	Order No.	Lgth. Ft.
07-00282	VOL00282	30

The Designers EDGE

Cord Storage Wheels

Tangle free cord storage for extension cords, holiday lights, rope or light wire.

Mfg. No.	Order No.	Cord Cap. Lgth. Ft.
E-102	DEGE102	150 of 16/3, 125 of 14/3

GB Gardner Bender

Cord/Cable Organizers
CableWraptor™

Organize, carry and store cords, ropes and cables. Simple to use, and easy to carry with ergonomic "T" shaped handle. Features stainless steel hinge, large teeth design and easy release trigger.

Mfg. No.	Order No.	Size	Max. Bundle Dia. In.
CW-T2R	GAB07636	Medium	2
CW-T3R	GAB07637	Large	3
CW-T4RR20	GAB07795	X-Large	4

CEP CONSTRUCTION ELECTRICAL PRODUCTS

Cart Lights

Features 1-1/4" square 12 ga. steel tube frame with removable head assembly. Steel generator platform. Can be plugged into standard 15A receptacles. Two-stage mast is raised and lowered by self-braking winch. Fixed ballast. "Safety yellow" powder coat finish.

Mfg. No.	Order No.	Lumens	Height Ft.	Wt. Lbs.
5322	CEP5322	220,000	5.5-12	196

VOLTEC INDUSTRIES

Temporary Area Lights
Metal Halide

Includes a metal housing for protecting bulbs. For use in areas such as parking lots, construction sites, marinas and tree lots.

Mfg. No.	Order No.	Cord Gauge	Cord Lgth. Ft.	Watts
08-00400	VOL00400	18/3	3	400

WOBBLELIGHT
The Light That Bounces Back From Abuse!

Work Lights
400 Watt — Metal Halide

For use in construction and heavy industrial applications. Features impact resistant polycarbonate dome with shock absorbers, internal ventilation system for keeping exterior cool, and reflector shield. Counter weight design keeps light upright.

Work Lights

Mfg. No.	Order No.	Dim. In. H x Dia.
WL400MH	WOB13690	36 x 18

Light Bulbs

Mfg. No.	Order No.	Desc.
D052198	WOBJTT	500W; for 36" Wobble Light

The Designers EDGE

Work Lights
Pro-Series® — Twin Head

1200W Halogen 2-in-1 Twin Head Tripod Power Light. Heavy duty construction and hinged style face. Telescopes from 40" to 76". Easy-Grip locking nuts. Adjustable extension leg for use on uneven surfaces. Sled base and tripod base included. Complete with four 300W halogen bulbs. Weatherproof On/Off switch. UL and CUL listed.

Mfg. No.	Order No.	Watts
L-19	DEGL19	1200

Work Lights
Home Light® — Twin Head

Dual halogen work lights. Includes sled base and tripod frame that adjusts from 40" to 67". Weather proof on/off switch. Includes two 500W halogen bulbs. UL, CUL listed.

Mfg. No.	Order No.	Watts
L-14SLED	DEGL14	1000

Work Lights
Portable — Gladiator™

Features spring-mounted light housing and heavy duty roll cage for protection against impact. Includes halogen bulb and extra bulb storage tube. Limited lifetime warranty. UL and CUL listed.

Mfg.No.	Order No.	Watts
L-113	DEGL113	500

The Designers EDGE

Halogen Work Lights
Portable — Wide Angle

Features hinged face frame with double bulb halogen light and weatherproof on/off switches and design lights up to 160° per head. Includes extra bulbs and bulb storage tube. Limited five-year warranty. UL, CUL listed. Includes three 250W halogen bulbs. Two power stages.

Mfg. No.	Order No.	Angle Cap.	Max. Watts	Desc.
L-5200	DEGL5200	160°	500	Portable worklight

Portable Work Lights
Halogen

Includes heavy duty clamp and 360° swivel hook and "S" stand with foam grip handle. With new Shadow Fighter™ grill. Includes 250W halogen bulb. Can be installed in damp locations such as bathrooms with showers or tubs, or outdoors but protected from the elements.

Mfg. No.	Order No.	Dim. In. H x L x W	Volts
L-860	DEGL860	9-7/8 x 6-1/4 x 5-3/4	120

Work Lights
Home Light® — Portable

"S" stand with foam grip handle. 500W halogen lamp. Includes bulb. UL, CUL listed.

Mfg. No.	Order No.	Desc.
L-33	DEGL33	w/ Foam padded feet

Work Lights
Home Light® — Clamp

Heavy duty clamp and hook. Weatherproof on/off switch. Includes 250W halogen bulb. UL, CUL listed.

Mfg. No.	Order No.	Watts
L-845	DEGL845	250

Clamp Lights
With Shade

Complete with 9-ft. cord, 10-1/2" aluminum shade with wire guard, and porcelain socket good for up to 250W bulb. UL & CUL listed.

Mfg. No.	Order No.	Max. Watts
E-245	DEGE240	250

Clamp Lights
Open Grill

Shadow free incandescent open grill clamp light features porcelain socket good for up to 250W bulb. Complete with 6-ft. cord. UL & CUL listed.

Mfg. No.	Order No.	Max. Watts
E-241	DEGE241	250

Flood Lights
Wall Mount

Fluorescent wall mount with dusk to dawn photocell. Electronic ballast works in lower temperatures (min. -20°). Includes one 65W fluorescent bulb, (300W incandescent equivalent).

Mfg. No.	Order No.	Watts	Lumens
L-90BR	DEGL90BR	65	4300

Floodlights
Halogen

Design features all metal construction with 1/2" IPS thread mounting arm. Comes complete with 500 watt halogen bulb. 8,000 Lumen output. UL, CUL listed.

Mfg.No.	Order No.	Color
L-50-BR	DEGL50BR	Bronze
L-50-WH	DEGL50WH	White

Shop Lights
Fluorescent

Provides 80W (600W incandescent equivalent) with two 40W T-12 or two 32W T-8 fluorescent tubes (not included). Electronic ballast works in lower temperatures (min. -20° F.). Includes 5-ft. cord. Limited UL, CUL listed.
DEGL180: Has pull chain chain.

Mfg. No.	Order No.	Lgth. In.
L-82	DEGL82	48
L-180	DEGL180	48

Strip Lights
Cold Start

Instant on with no flicker. Electronic ballast allows fixture will instantly start with temperatures as low as -20°. Ideal fixture light for under cabinet, kitchen, shop, laundry room or basement. Includes connector cord to link multiple lights together. Provides 825 lumens. Linkable design, includes connector cord to link multiple lights together. Uses 15 watt T-5 fluorescent bulbs (included).

Mfg. No.	Order No.	Watts	Lgth. In.
L-176	DEGL176	15	18

Trouble Lights
Fluorescent

Features 13 watt fluorescent bulb (60 watt incandescent equivalent), safety stripe cord, on/off switch and swivel hanging hook. UL, CUL listed.

Mfg. No.	Order No.	Cord Type	Cord Lgth. Ft.	Color
L-1920	DEGL1920	18/2	6	Yellow

Trouble Lights
Plastic

Incandescent trouble light features plastic head and guard with swivel hook.

Mfg. No.	Order No.	Cord Type	Lgth. Ft.	Color
E-237	DEGE237	18/2	15	Yellow

VOLTEC INDUSTRIES

Work Lights
Metal Guard

Three-Wire plug. On/off switch and outlet on light handle. For indoor and outdoor use. Max. 75W bulb. NEMA 5-15 U-ground.

Mfg No.	Order No.	Cord Lgth. Ft.
08-00184	VOL00184	25

Electrical

VOLTEC INDUSTRIES

Light Strings

Weather resistant 12 AWG yellow vinyl light strings. 150W sockets with non-metallic guards spaced every 10 feet. Locking connection NEMA L5-20 U-ground.

Light Strings

Mfg. No.	Order No.	No. Sockets	Lgth. Ft.
08-00193	VOL00193	5	50
08-00194	VOL00194	10	100

Accessories

Mfg. No.	Order No.	Desc.
08-00203	VOL00203	Plastic replacement cage

Replacement Cages
Light String

Vinyl coated metal replacement cage for temporary light string.

Mfg. No.	Order No.	Desc.
08-00204	VOL00204	Replacement cage

The Designers EDGE

Work Light Lenses

Replacement lens for most 500W halogen work lights. Constructed from 5mm tempered safety glass. Carded.

Mfg. No.	Order No.	Desc.	Size In.
L-4705	DEGL4705	Replacement glass lens	5-3/8 x 7

The Designers EDGE

Halogen Lamps

DEGL16

DEGL95

DEGL67

Mfg.No.	Order No.	Watts
	4-5/8" Lamps – 130V	
L-16	DEGL16	500
L-32	DEGL32	300
	3" Lamps – 130V	
L-95	DEGL95	150
L-96	DEGL96	250
	10" Lamps – 110V	
L-67	DEGL67	1500

* Rough service lamp.

Halogen Bulb Storage Cases
Rough Service Bulb Buddy™

DEGL21250W

DEG300WRS

DEGL15500W

Complete with six heavy duty rough service 4000 hour rated halogen bulbs with heavy duty filament support. Heavy duty plastic storage case with foam inserts that protect bulbs from damage.

Mfg. No.	Order No.	Pkg. Qty.	Watts	Lamp Life Hrs.
L-2150W	DEGL21250W	6	250	4000
L-22	DEG300WRS	6	300	4000
L-23	DEGL15500W	6	500	4000

SATCO

Fluorescent Lamps

48" bi-pin energy-saver lamps.

Mfg. No.	Order No.	Watts
S6600	SAT24596	34

Fluorescent Lamps

96" recessed DC energy-saver lamps.

Mfg. No.	Order No.	Watts
S6676	SAT06676	110

Fluorescent Lamps

96" single pin energy-saver lamps.

Mfg. No.	Order No.	Watts
S6640	SAT29815	60

Fluorescent Lamps
Linear — T8

Medium, bi-pin base. 4100K cool white. 7500-hr. average lifetime.

Mfg. No.	Order No.	Watts	Lumens	Lgth. In.
S7949	SATS7949	15	850	18

Fluorescent Lamps
Electronic — T8

Features environmentally friendly energy efficient design. 20,000-hour average life. Medium bi-pin base. Meets federal TCLP criteria for non-hazardous waste.

Mfg. No.	Order No.	Watts	Lumens	Lgth. In.
S6619	SAT06619	32	2800	48

GHD Order Desk
(907) 279-6691
1-800-478-4393

ORDER ONLINE TODAY — SHIPS OUT TOMORROW!
www.ghdalaska.com

2192 VIKING DRIVE
ANCHORAGE, AK 99501

GENERAL HARDWARE DISTRUBUTORS

SATCO

Fluorescent Lamps
High Performance — T5

Features tri-phosphor construction with electronic ballast and mini bi-pin base. 20,000-hour average life.

Mfg. No.	Order No.	Watts	Lumens	Lgth. In.
S6445	SAT20906	54	4725	48

Fluorescent Lamps
Electronic — T8

Features single pin base. 15,000-hour average life. Cool white.

Mfg. No.	Order No.	Watts	Lumens	Lgth. In.
S6540	SAT21736	59	5700	96

Fluorescent Lamps
U-Bent

22-1/2" bi-pin energy-saver lamps.

Mfg. No.	Order No.	Watts
S6680	SAT24046	40

The Designers EDGE

Flat PL Fluorescent Lamps

3U flat fluorescent lamp. Replacement bulb for the model No. L 2004 and L 2005 work light.

Mfg. No.	Order No.	Watts
L-766	DEGL766	65

SATCO

Magnetic Ballasts

Accommodates two lamps. 120V.

Mfg. No.	Order No.	For Use With Lamp Type	Desc.
S6620	SAT48001	4-Ft. F34T12	Rapid start
#S6621	SAT48018	8-Ft. F96T12	Instant start slimline

Electronic Ballasts
Instant Start

Accommodates two lamps. 120/277V.

Mfg. No.	Order No.	For Use With Lamp Type
S5208	SAT49943	4-Ft. F32T8
S5213	SAT49598	8-Ft. F96T8

Compact Fluorescent Lamps

Twin-tube four-pin for electronic and dimming ballasts.

Mfg. No.	Order No.	Watts
S8312	SAT06312	13

Compact Fluorescent Lamps
Hi-Pro Spiral

Best for reading, display use and to show colors accurately. 120V, medium base, spiral bulb with 10,000 average rated hours. Replaces a 300W incandescent bulb.

Mfg. No.	Order No.	Watts	Lumens	OAL In.
S7339	SAT07339	55	3700	9.64

SATCO

Compact Fluorescent Lamps
T2 Ultra — Mini Spirals

E26 medium base. 10,000-hour rated life. Energy Star qualified. C.U.L. listed. 3 per package.
2700K Soft White: For living areas, bedrooms and dining spaces. Approverd for totally enclosed applications.
4100K Bright White: For office use, work areas and general lighting.

Mfg. No.	Order No.	Watts	Lumens	OAL In.
	2700K Soft White			
S6271	SAT06271	18	1200	4.52
S6274	SAT06274	23	1600	4.88
	4100K Bright White			
S6272	SAT06272	18	1200	4.52
S6275	SAT06275	23	1600	4.88

Compact Fluorescent Lamps
T2 — Mini Spiral

4" overall length. Medium base. 10,000-hour rated life. Energy Star qualified. Four per pkg. C.U.L. listed.
SAT06235: For residential and restaurant use. Approverd for totally enclosed applications. 2700K soft white.
SAT06236: For office use, work areas and general lighting. 4100K bright white.

Mfg. No.	Order No.	Watts	Lumens
S6235	SAT06235	13	800
S6236	SAT06236	13	800

SATCO

Light Bulbs
A19

Soft white with medium brass base. 120V. 1500-hour average life. Four-pack.

Mfg. No.	Order No.	Watts	Lumens
S1810	SAT01810	40	280
S1811	SAT01811	60	500
S1812	SAT01812	75	650
S1813	SAT01813	100	950

Light Bulbs
3-Way — A21

Soft white with medium brass base. 120V. 2500-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S1821	SAT01821	50/100/150	1050

Light Bulbs
A21

Frosted with medium base. 130V. 2500-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S3980	SAT03980	150	1750

SATCO

Light Bulbs
A23

SAT03982

Features medium brass base. 130V. 200W, 2500 average rated hours, 2500 lumens.

Mfg. No.	Order No.	Desc.
S3982-T1	SAT03982	Rough service tough coat
S3983	SAT03983	Clear

Light Bulbs
PS25

SAT04959

SAT04960

For general purpose use. Features medium brass base. 130V, 300W, 3600 lumens. 2500-hour average life.

Mfg. No.	Order No.	Desc.
S4959	SAT04959	Clear
S4960	SAT04960	Frosted

Light Bulbs
Rough Service — A19

Frosted with medium base. 130V. 2500-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S3969	SAT03969	50	320
S3970	SAT03970	75	620
S3971	SAT03971	100	880

SATCO

Light Bulbs
Rough Service — Shatterproof

For use in hospitals, restaurants and recreation facilities. Mylon® coating holds particles of glass together to prevent shattering. Frosted with medium brass base.

Mfg. No.	Order No.	Bulb Type	Rated Hours	Lumens
S3928	SAT03928	A19	5000	680
S3929	SAT03929	A19	5000	960
S4883	SAT04883	A21	2500	1750

Light Bulbs
Rough Service

Features A23 bulb style, medium screw base and frosted color. 130V. 1000-hour average life.

Mfg. No.	Order No.	Watts	Lumens	OAL In.
Y15243	SAT15243	150	2090	6
Y15458	SAT15458	200	2920	5-7/8

Light Bulbs
Low Voltage — A19

Frosted with medium brass base. 12V. 1500-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S5011	SAT05011	50	540

SATCO

Floodlights
Weatherproof — BR38

For outdoor use. Clear with medium brass base. 130V. 2000-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S2321	SAT02321	75	700
S2325	SAT02325	150	1550

Floodlights
Extra Life — Indoor — BR30

Frosted with medium brass base. 130V. 5000-hour average life.

Mfg. No.	Order No.	Watts	Lumens
S6208	SAT06208	65	532

Heat Lamps
Infrared — R40

Clear with medium brass base. 120V. 5000-hour average life.

Mfg. No.	Order No.	Watts
S4999	SAT04999	250

SATCO

\\ Metal Halide Light Bulbs
Elliptical

Mfg. No.	Order No.	Type	Watts	Volts
S5845	SATS5845	BT-37	1000	125

VOLTEC INDUSTRIES

Metal Halide Bulbs
Pulse Start

Replacement bulb for the Voltec temporary 400W light (VOL00400).

Mfg. No.	Order No.	Watts
02845	VOL02845	400

SATCO

Metal Halide Lamps

Mfg. No.	Order No.	Watts	Base
S3128	SATS3128	175	Medium
S5843	SATS5843	400	Mogul

SATCO

Mercury Vapor Lamps

Mogul base.

Mfg. No.	Order No.	Watts
S1936	SATS1936	175

High-Pressure Sodium Lamps

Medium base.

Mfg. No.	Order No.	Watts
S3127	SATS3127	70

RELIANCE CONTROLS

Load Testers
Appliance

One-of-a-kind meter gives instant, accurate readout of amps or watts used by common cord-connected household appliances and lights. Accurate digital readout from 1.0 – 15.0 amps and 125 – 1875 watts. Easy slide-switch action instantly converts between amps and watts. Long 26" cord reaches to remote electrical outlets. Rugged, high-impact construction.

Mfg. No.	Order No.	Desc.
THP103 AMWATT	REA00004	Load Tester

PELICAN

Flashlights
Super Sabrelite™

ABS resin body resists chemicals, corrosion, and extreme temperatures. Unlike ordinary flashlights that produce a yellow beam, the SabreLite's incredibly bright Xenon lamp produces a powerful collimated white beam. Waterproof to 500 ft. UL, CSA, FM, MSHA, AUS and EX approved.

Flashlights

Mfg. No.	Order No.	Battery Type
2000C-ORANGE	PEL2000C	C(3)

Accessories

Mfg. No.	Order No.	Desc.
2004	PEL2004	Xenon lamp module

Flashlights
Super Pelilite™

ABS body resists chemicals, water and corrosion. Polycarbonate lens and focused Xenon lamp module produce a tight white beam that penetrates smoke and fog. Waterproof to 250 ft. UL, CSA, FM, MSHA, IP67 and EX approved.

Flashlights

Mfg. No.	Order No.	Battery Type
1800C-ORANGE	PEL1800C	C(2)

Accessories

Mfg. No.	Order No.	Desc.
1804	PEL1804	Replacement lamp module

LED Flashlights
Recoil LED™ — Stealthlite™

Collimated LED beam cuts through smoke, dust and darkness. Features ABS body, nylon lens, one-handed safety switch and 32-hour battery life. Water-resistant up to 500 ft. Powered by four AA batteries (included). FM, ATEX approved.

Mfg. No.	Order No.	Color	Lumens
2410C-YELLOW	PEL2410C	Yellow	32.0

PELICAN

Flashlights
Stealthlite™

Easy slide thumb switch is easy to operate, even with gloves. Tough resin body is corrosion proof and resistant to extreme temperatures. Xenon lamp produces a bright beam that penetrates thick smoke, fog, and dust. Water-resistant. UL, CSA, FM, MSHA, AUS and EX approved.

Flashlights

Mfg. No.	Order No.	Battery Type
2400C-YELLOW	PEL2400C	AA(4)

Accessories

Mfg. No.	Order No.	Desc.
2404	PEL2404	Replacement lamp module

Flashlights
Mitylite™

Measures 4-3/4" L. Hi-performance Xenon lamp module produces a powerful, bright beam.. Waterproof to 500 ft. and comes with a twist-on shroud.

Flashlights

Mfg. No.	Order No.	Battery Type
1900C-YELLOW	PEL1900C	AAA(2)

Accessories

Mfg. No.	Order No.	Desc.
1904	PEL1904	Replacement lamp module

Flashlights
Mitylite™

Xenoy body is water and chemical resistant. Pre-focused Xenon lamp module produces a powerful, bright white, modified spot beam. Rotary on/off switch. Includes alkaline batteries.

Flashlights

Mfg No.	Order No.	Battery Type
2340C-YELLOW	PEL2340C	AA(2)

Accessories

Mfg. No.	Order No.	Desc.
2304	PEL2304	Xenon lamp module

PELICAN

LED Flashlights
Model L1

Concentrated beam for close-quarters applications. LED lamp provides 50,000 hours of use. Push button on/off switch. 100-hour battery life; uses four 1.5V coin-cell batteries. Includes breakaway safety lanyard.

Mfg. No.	Order No.	Lgth. In.	Body Color	Lamp Color
1930C-YELLOW	PEL1930C	2-1/2	Yellow	White

Helmet Light Holders

Clamp mounts on helmet or hard hat rim. Adjustable positioning avoids goggles and faceplate. Holds Pelican 1900, 1910, 1970, 2200, 2270, 2300, 2350, 2400 and 2450 flashlights.

Mfg. No.	Order No.	Desc.
770	PEL770	Helmet light holder

Underwater Kinetics
Uncompromising performance since 1971

LED Flashlights

Features thermal recovery system, which recycles heat from LED to warm batteries for improved performance in low temperatures. High impact ABS and polyurethane rubber construction for durability. Beam produces a bright spot with almost no peripheral light. Waterproof design for all weather use and push-button tail switch switches light between ON/OFF with continuous or momentary action. CL I DIV 1 certified.

UND10001: 8-hour burn time with a beam distance of 304ft.
UND14431: 4 to 5-hour burn time with a beam distance of 631ft.

Mfg. No.	Order No.	Lumens	Battery Type
10001	UND10001	110	3-AA
14431	UND14431	120	4-AA

Underwater Kinetics
Uncompromising performance since 1971

Flashlights
Xenon

Rubber sheath molded over bezel to reduce glare and improve impact resistance. Push-button thumb switch. Prefocused high intensity spot beam. Tough, non-corroding ABS and polycarbonate plastic construction. 4 to 5-hour burn time with a beam distance of 311 ft. CL I DIV 2 certified.

Mfg. No.	Order No.	Lumens	Battery Type
14120	UND14120	38	4-AA

LED Flashlights
GatorLite

High-impact ABS molded rubber construction for durability. Features thermal recovery system, which recycles heat from the LED to warm batteries for improved performance in low temperatures. Beam produces bright spot with almost no peripheral light. Features a large push button switch and ergonomic belt clip for more comfortable and secure grip. 32-hour burn time with beam distance of 500 ft. CL I, II, III DIV 1 certified.

Mfg. No.	Order No.	Lumens	Battery Type
22101	UND22101	125	3-C

Flashlights
Xenon — Right Angle

Head rotates 360°. Rubber sheath molded over bezel to reduce glare and improve impact resistance. Rubber covered thumb switch allows momentary or continuous duty. Tough, non-corroding ABS and polycarbonate plastic construction. Includes split ring and clip for attachments to coat pocket, belts, or straps. 4- to 5-hour burn time with a beam distance of 311 ft. CL I DIV 2 certified.

Mfg. No.	Order No.	Lumens	Battery Type
14191	UND14191	38	4-AA

MAG-LITE Flashlights

Flashlights
Mini Maglite® AA

Rugged, machined aluminum case.Button-less activation — twist head to turn on. with a "Spot-to-Flood" adjustable beam. Anodized for corrosion resistance and durability Water and shock-resistant. Includes spare lamp in battery compartment.

Mfg. No.	Order No.	Color
M2A016	MGLM2A016	Black
M2A036	MGLM2A036	Red
M2A116	MGLM2A116	Blue

Accessories

Replacement Lamps — 2 per card

LM2A001	MGLLM2A001	Mini Maglite AA

Flashlights
Mini Maglite®

Compact design. Aluminum alloy construction with O-ring seal for water resistance. Features fast-focus spot-to-flood beam, candle mode for hands-free use, and spare lamp in tail cap. Batteries included.

Mfg. No.	Order No.	Batteries	OAL In.	Battery Life Hrs.
SP2201H	MGLSP2201H	Two AA	5-3/4	5

LED Flashlights
MAG-LED™

Rugged, machined aluminum case with momentary On-Off and adjustable beam with rotating head focus and highly refined reflector. Interchangeable light source; includes krypton lamp stored in tail cap. Intelligent Energy Source Management — continuously monitors the balance between high brightness and efficient power usage allowing for prolonged battery life

MGLST2D016: 10" in Length
MGLST3D016: 12-11/32" in length

Mfg. No.	Order No.	Batteries
ST2D016	MGLST2D016	(2) D-cell
ST3D016	MGLST3D016	(3) D-cell

MAG-LITE Flashlights

Flashlights
Rechargeable

High strength aluminum case. Adjustable beam focus and intensity. Includes spare lamp in battery compartment. Water and shock-resistant. Includes 12V DC cigarette lighter adapter, 100V AC converter, rechargeable battery pack, recharging cradle and two mounting brackets.

Rechargeable Systems

Mfg. No.	Order No.	Color
RN1019	MGLRN1019	Black

Accessories

Mfg. No.	Order No.	Desc.
ARXX235	MGLARXX235	Battery pack, 6V NiCd

Replacement Lamps

LR00001	MGLLR00001	Halogen lamp, 1 per card

NEBO® TOOLS

Aluminum Flashlights
PROTEC™ BAT-Light™

BAT Light™ is a high-powered tactical light that uses a CREE® XRE LED to produce 200 lumens of bright white light. Ideal for military, law enforcement, and self-defense. Three lighting modes: 100% light (200 lumens,) 50% light (100 lumens) and Defensive Strobe (200 lumens.) Water-resistant body is constructed from aircraft grade anodized aluminum. The 16" bat-like design provides comfort when in use and allows for more control over the flashlight. Also included is a lanyard that attaches to the base to keep this light handy.

Mfg. No.	Order No.	Lumens
5904	NEB5904	200 (100% Light) 100 (50% Light) 200 (Defensive Strobe)

NEBO® TOOLS

LED Flashlights
CSI INVESTIGATOR™

18 powerful White LED's, six powerful Green LED's, six powerful UV LED's, red laser pointer travels over 450 yards, emergency flasher function — white LED's in flash mode, anodized aircraft grade aluminum, water-proof compact body design, directional com-pass.

Mfg. No.	Order No.	Lumens
5075	NEB5075	32.4

Pocket Flashlights
LED

Perfect for night fishing, hunting, and camp-ing. Features water-resistant body design, steel belt clip, magnetic base, and glow-in-the-dark power switch. Eight-yard viewing distance. Constructed of reinforced nylon polymer.

Mfg. No.	Order No.	Lumens	Dim. In. L x Dia.
5577	NEB5577	50	3-5/8 x 3/4

LED Flashlights
REDLINE™

One high power LED bulb, emergency strobe mode, S.O.S. Flash Mode — LED flashes S.O.S. Morse code sequence, anodized air-craft grade aluminum weather-proof compact body design, magnetic base for hands-free lighting, aggressive self-defense face and rear glow-in-the-dark button.

Mfg. No.	Order No.	Lumens
5599	NEB5559	220

Rechargeable LED Flashlights
Highbeam™

One high power LED. Anodized aircraft grade aluminum waterproof compact body design. Weather-resistant. 12V spring base designed to fit every automobiles 12V sock-et. Recharging indicator glows red when plugged in. Assorted colors.

Mfg. No.	Order No.	Lumens
5550	NEB5550	35

EVEREADY®

Flashlights
Industrial

EVE1259

EVEE250Y

EVE1259. Chemical, grease and impact re-sistant case. Integrated spare bulb holder. UL listed.
EVEE250Y. Bright krypton bulb.
EVEE251Y Bright krypton bulb. Heavy duty magnet.

Mfg. No.	Order No.	No. Batteries	Lgth. In.
1259	EVE1259	2(D)	8
E250Y	EVEE250Y	2(D)	7.3
E251Y	EVEE251Y	2(D)	7.3

Flashlights
Utility

Water, gas, grease, alcohol and oil-resistant. Withstands temperature extremes. Break re-sistant lens.

Mfg. No.	Order No.	Cell Size Volts	Battery Type
5109LS	EVE5109WBS	6	Lantern

Flashlights
Energizer®—LED

With built-in carabiner belt clip and easy to use push button switch. Waterproof with oil and grease resistant body and shatterproof lens. One white LED. Includes 2 D batteries.

Mfg. No.	Order No.	Lumens	Battery
MS2DLED	EVEMS2DLED	28	D

GreatNeck® Since 1919

Two-Piece Aluminum
Flashlight Sets — GreatLite®

Water and shock resistant aluminum body. Includes one 3D flashlight and one 2AA flash-light, belt pouch, batteries and extra bulb.

Mfg. No.	Order No.	Desc.
32028	GRN32028	Two flashlight set

DORCY®

Flashlight Combo Packs

High impact resin construction with krypton bulbs, tail cap foldaway hand rings, and du-rable slide switches. Includes batteries.

Mfg. No.	Order No.	Desc.
41-3480	DRC43480	Two 2D and two 2AA flashlight combo pack

Spotlights
Pistol Grip — Rechargeable

For use in vehicle, out-door or construction applications. Features sealed lead acid battery, white halogen bulb, lock-ing trigger, and non-slip rubber grip. Includes AC and DC charging adapt-ers. Features flat bottom for hands-free operation.

Mfg. No.	Order No.	Candle Power
41-1088	DRC41088	5 Million

EVEREADY®

LED Spotlights
Pistol Grip

Lamp operates with one white CREE LED. With long-distance beam and tight white spot for searching. Impact and water re-sistant. Includes four C batteries.

Mfg. No.	Order No.	Lumens	Runtime Hrs.
TUF4CPE	EVE02770	130	12

GHD Order Desk
(907) 279-6691
1-800-478-4393
ORDER ONLINE TODAY — SHIPS OUT TOMORROW!
www.ghdalaska.com
2192 VIKING DRIVE
ANCHORAGE, AK 99501
GENERAL HARDWARE DISTRIBUTORS

NEBO® TOOLS

LED Work Lights
Pocket

Reinforced plastic body design that is shockproof and water-resistant and has 8 powerful LED lights with a rotating magnetic clip. Recessed LED housing. Includes 3-AAA batteries.

Mfg. No.	Order No.	Lumens
5618	NEB5618	60

The Designers EDGE

Trouble Lights
Cordless

High power LED spotlight for directional trouble shooting with 16 super bright 50,000-hour rated LED's. On/off switch on handle operates light, laser and spotlight separately. Includes laser pointer, heavy duty magnet on handle, anti-roll design, and impact-resistant aerospace grade aluminum body. Three AAA batteries included.

Mfg. No.	Order No.	Desc.
L-1407	DEGL1407	Multi use

DORCY

Signal Wands

For professional use in traffic, parking, security, construction, emergency and law enforcement applications. Lightweight, durable design. Features nine LEDs in wand tip, five LEDs in wand body, and three light functions (flashing, constant and LED flashlight tip). Weatherproof. Includes hand strap lanyard. Requires three C-cell batteries (not included).

Mfg. No.	Order No.	Lgth. In.
41-1063	DRC41063	12

EVEREADY

Area Lights
Energizer®—LED

From the Energizer® Hard Case® Professional® line of products. Three LEDs deliver broad area of light. Two mounting options: magnetic mount and wall mount. Impact absorbing rubber casing. Push lens switch to activate. Includes 3 AA batteries.

Mfg. No.	Order No.	Lumens	Battery
TUFPAL31E	EVE10248	50	AA

Performance Tool®

Work/Flashlights
LED

24 LED area lights and three LED spot lights. Rare earth magnet on back for hands-free work. Bright White LEDs never need replacing. Uses three AAA batteries (Included).

Mfg. No.	Order No.	Battery Type	Dim. In. H x W x D
W2364	WIM13364	3-AAA	3.5 x 2.4 x 1.4

LED/Laser Lights
2-in-1

Features magnetic base and flexible head with LED light and red laser pointer. Includes batteries.

Mfg. No.	Order No.	Desc.
W2380	WIM13380	2-in-1 LED light and laser

COAST™

Keychain Flashlights
Mini Tac Torch™

LED keychain light with four AG13 batteries. 76-hour battery life.

Mfg. No.	Order No.	Lumens
TT7830CP	COA07830	15

PELICAN™

LED Headlamps
Headsup Lite™

Features ABS body and shroud with multi-angle pivoting head and dual mode beam. Includes strap and Three AAA batteries. Battery life: 18 hours (low beam); 2 to 3 hours (High beam). UL, ATEX approved. Black.

Mfg. No.	Order No.	Lumens	Beam Dist. m	Battery Life Hrs.
		26 (High)	44 (High)	2.25 (High)
2620C	PEL2620C	14 (Low)	29 (Low)	18 (Low)

LED Headlamps
HeadsUp Lite™

Hands-free. Dual mode button activates all three LEDs, or just one to extend battery life. Includes 2 adjustable straps (cloth or rubber) and three AAA batteries.

Mfg. No.	Order No.	Lumens	Lamp Range M	Battery Life Hrs.
2610C	PEL2610C	30 (High)	29 (High)	19 (High)
		14 (Low)	19 (Low)	47 (Low)

PETZL®

LED Headlamps
TIKKA™

Offers great versatility with its three lighting modes (maximum, economic and flashing), which are accessed by a simple electronic push-button switch. In maximum mode, the four LEDs deliver 40 lumens of light and provide enough light to see over a distance of 29 meters. The economic mode optimizes battery life and therefore provides a long burn-time of up to 120 hours. The battery compartment is now hinged for easier access along with an easier to use closure system.

Mfg. No.	Order No.	Lumens	Lamp Range M	Battery Life Hrs.
E93PS	PZLE93PT	40	29	120

PETZL

LED Headlamps
TIKKA® XP HAZLOC

For use in Division Two (low risk of exposure to ignitable gases). Powerful focused beam with three lighting levels and strobe mode. Features wide angle lens, battery level indicator and boost mode: 50% more light than maximum for 20 seconds. Includes three AAA batteries.

Mfg. No.	Order No.	Lumens	Lamp Range M	Battery Life Hrs.
E78BHB	PZLPIXA2	40	35	120

LED Headlamps
ZIPKA™

The ultra-compact ZIPKA™ headlamp is equipped with the ZIP retractable cord system. This feature allows the headlamp to be worn on the head or wrist, or attached to any other support, like a tent pole, etc. This headlamp is extremely versatile, thanks to its three lighting levels (maximum, economic and flashing), which are accessed with a simple electronic push-button switch.

Mfg. No.	Order No.	Desc.	Battery Type
E94PS	PZLE94PS	4 LED	AAA (2)

COAST™

LED Headlamps
Lenser™

Focusing headlamp includes dimmer switch, high intensity white LED, advanced focusing system, variable light output, adjustable straps and carrying case. Includes three AAA batteries.

Mfg. No.	Order No.	Lumens	Lamp Range M	Battery Life Hrs.
19284	COA19284	155	180	4.5

EVEREADY®

LED Headlamps
Lithium — Energizer Ultimate™

Aluminum alloy construction makes it extremely lightweight and durable. Five light modes: white (high, medium, low), strobe and red with green “find me” or “follow me” LED. Lithium power increases runtime, even in extreme temperatures. Lithium batteries included.

Mfg. No.	Order No.	Lumens	Battery Life Hrs.
ELHD2AL	EVEELHD2AL	100	11 (High) 38 (Med.) 53 (Low)

LED Headlamps
3 LED

High tech LED headlight for hands-free performance. Equipped with bright LED bulbs—two whites for super bright light and one red for night vision operated by three-position slide switch. Pivoting directional light lets you point the light right where you need it. ABS plastic housing for extra durability. Adjustable headband holds 3 AAA batteries (included).

Mfg. No.	Order No.	Lumens	Lamp Range M	Battery Life Hrs.
HD33A1EN	EVEHD33A1E	20	32	30

Underwater Kinetics
Uncompromising performance since 1971

LED Headlamps
Vizion™

High impact ABS molded rubber construction for durability. Thermal recovery system recycles heat from the LED to warm batteries for improved performance in low temperatures. Waterproof with three beam patterns: spot, diffuse, and red diffuse. High and low power settings, large push button, and rotating beam angle adjustment knob. Takes three AAA batteries. CL I DIV 1 certified.

Mfg. No.	Order No.	Lumens	Lamp Range Ft.	Battery Life Hrs.
17018	UND17018	65	197 (High) 127 (Low)	13

EVEREADY®

LED Headlamps
Energizer® — Brilliant Beam™

For hands-free lighting with adjustable lighting modes, multiple color LEDs, dual switches and ability to direct light where needed. Three light modes: white spot, white flood & green high contrast. Fits on helmets, with wider headband, tilt head and pencil holders. Three AAA batteries included.

Mfg. No.	Order No.	Desc.	Battery Type.
INHD5L32E	EVE11140	5 LED	AAA (3)

NEBO® TOOLS

LED Clip-on Lights
6 LED Quarrow™

Sleek, multi-directional clip-light with an easy to activate push-button switch. Switch between 2 LEDs, 6 LEDs, 6 LEDs in flash mode or 6 LEDs in S.O.S. mode; four lighting modes in all to best suit your lighting needs. The head of the cap-light rotates 90° and turns 360° to give you lighting in any direction. Water-proof and shock-proof,

Mfg. No.	Order No.	Lumens	Battery Life Hrs.
5103	NEB5103	10.8	48 (6 LEDs) 120 (2 LEDs)

PELICAN™

LED Cliplights

Multi-purpose clip attaches to surfaces up to 1/2" thick. Head flips to activate LEDs and rotates 180°. 100-hr. battery life. Includes two 3V Lithium batteries. UL, ATEX approved.

Mfg. No.	Order No.	Lumens
2220C-ASSORTED	PEL2220C	6.0

EVEREADY

Batteries
Energizer®

EVEE91BP2

EVEE92BP2

EVEE93BP2

EVEE95BP2

EVEE95FP8

EVEE90BP2

EVE522

EVE529

EVE528

Energizer® MAX® with Power Seal Technology, which holds power for up to 10 years while in storage providing long life for the devices you use every day.

Mfg. No.	Order No.	Desc.	Pkg. Qty.
528	EVE528	Lantern	1
529	EVE529	Lantern	1
522BP	EVE522	9V	1
E90BP-2	EVEE90BP2	N	2
E91BP-2	EVEE91BP2	AA	2
E92BP-2	EVEE92BP2	AAA	2
E93BP-2	EVEE93BP2	C	2
E95BP-2	EVEE95BP2	D	2
E95FP-8	EVEE95FP8	D	8

EVEREADY

Batteries
Energizer® — Alkaline — Industrial

EVEEN91

EVEEN92

EVEEN93

EVEEN95

EVEEN22

EVEEN529

Produced to the same specifications as Energizer Long Life Alkaline batteries and designed for today's heavy current or continuous applications. Offer the longest lasting power source of all primary batteries over a range of sizes. Operate well in temperature extremes (-20° — 120°F) with a five year shelf life.

Mfg. No.	Order No.	Battery Type	Pkg. Qty.
EN91	EVEEN91	AA	4
EN92	EVEEN92	AAA	4
EN93	EVEEN93	C	12
EN95	EVEEN95	D	12
EN22	EVEEN22	9V	12
EN529	EVEEN529	6V	1

Batteries
Carbon Zinc

6-volt, carbon-zinc battery with 11,000 mAh battery capacity is an ideal selection for heavy-duty battery needs with a seven year shelf life.

Mfg. No.	Order No.	Battery Type
1209	EVE1209	Lantern

EVEREADY

Batteries
Energizer® — Rechargeable

EVENH12BP2

EVENH50BP2

EVENH22NBP

Engineered for extended power, Energizer® Recharge® Power Plus delivers longer lasting power per charge and delivers more cycles and quicker charges for reusable power to keep power hungry devices working longer.

Mfg. No.	Order No.	Battery Type	Pkg. Qty.
NH12BP-2	EVENH12BP2	AAA	2
NH15BP-2	EVENH15BP2	AA	2
NH35BP-2	EVENH35BP2	C	2
NH50BP-2	EVENH50BP2	D	2
NH22NBP	EVENH22NBP	9V	1

Battery Chargers
Energizer®

LED charge indicators; Reverse polarity protection: protects the charger and batteries against damage from incorrectly installed batteries; Charges multiple combinations of AA, AAA, C, D and 9V NiMH batteries. (Batteries not included.)

Mfg. No.	Order No.	Desc.
CHFCV	EVECHFCV	Universal battery charger

EVEREADY

Batteries
Energizer E²® — Lithium

Long-lasting lithium power lasts up to 8 times longer in digital cameras (versus ordinary alkaline batteries). Ideal for CD players, two-way radios, photo equipment and more.15-year shelf life

Mfg. No.	Order No.	Battery Type	Pkg. Qty.
L91BP-2	EVEL91BP2	AA	2
L92BP-2	EVEL92BP2	AAA	2

Lithium Batteries

#123. Performs in extreme temperatures from -40° – 140°F. Weights 1/3 less than standard alkaline batteries. 15 year storage life

Mfg. No.	Order No.	Volts	Pkg. Qty.
EL123BP-6	EVE123BP6	3	6

Alkaline Batteries

12V. Optimal power for electronics around the house, like keyless entry, electronic books and garage door openers.

Mfg. No.	Order No.	Battery Type	Pkg. Qty.
A23BPZ-2	EVEA23BPZ2	A23	2

EVEREADY

Lithium Batteries
Energizer®

Performs in extreme temperatures from -40° to 140° F. Developed to provide optimum, long-lasting performance for film and digital cameras. Holds power for ten years when not in use.

Mfg. No.	Order No.	Volts	Pkg. Qty.
EL1CR2BP	EVECR2	3	1

Batteries
Energizer E²®

Patented Titanium Technology® and Advanced Cell Construction provide exceptional long-lasting power in your most power-hungry devices.

Mfg. No.	Order No.	Battery Type	Pkg. Qty.
E96BP-2	EVEE96BP2	AAAA	2

Performance Tool®

Emergency Phone Chargers
USB

Provides battery charge for emergency situations. Use for short term power on cell phones, tablets, cameras and more. Works with any standard USB cable. Includes 2AA batteries.

Mfg. No.	Order No.	Desc.
W2373	WIM04814	Emergency phone charger.

ARIES MANUFACTURING
A Division of Boss Tech Products Inc.

Charging Adapters
USB

ARI19193 ARI19194

USB charging adapters for cell phones. Assorted colors.

Mfg. No.	Order No.	Desc.
CWP-USBBOWL-AC	ARI19193	120V AC adapter
CWP-USBBOWL-DC	ARI19194	12V DC adapter

Cell Phone Chargers
12V — Apple® iPhone®

Recharge your Apple® branded cellular devices quickly and efficiently from any working cigarette outlet. Recharges most phones in 2 - 3 hours. Durable strain relief coiled cord design. Black.

Mfg. No.	Order No.	Desc.
CWP-CLA-IPHON3G	ARI18943	DC car charging cord for Apple® branded devices

Charging Cable
Apple® — USB

USB cable for syncing and charging. Compatible with Apple® iPhone, iPod and iPad. White.

Mfg. No.	Order No.	Length Ft.
190344	ARI19034	3

Solar Power Generator Kits
Solar Panels with Inverter

Excellent for cabins, remote power, backup power, 12V battery charging, RV's and boats. Maintenance free/easy installation. Works in all weather conditions. Built-in blocking diode protects battery discharge at night. Durable ABS plastic with amorphous solar cell. Max output four amps. Includes the following: four x 15W amorphous solar panels, plastic PVC frame for mounting panels, 12V DC plug, alligator battery clamps, mounting screws, extra wiring, four-in-one wire connector so all four panels can be wired together easily, 12V DC socket for powering 12V products, 200W modified sine wave inverter and 7A solar charge controller.
Note: Battery not included.

Mfg. No.	Order No.	Max. Output Watts	Dim. In. L x W x H
50048	SUN50048	60	41 x 13-1/4 x 16-1/4

Battery Chargers
Solar Panel

For automobiles, RV's, boats, tractors, ATVs, electric fences, telemetry, and more. Maintenance free/easy installation. Works in all weather conditions. Ultra bright blue LED provides charging indication, built-in blocking diode protects from battery discharge at night. Made of durable ABS plastic with amorphous solar cell.

Mfg. No.	Order No.	Volts	Max. Output	Dim. In. L x W x H
50032	SUN50032	12	15 watts	13 x 13-1/2 x 1-1/2

Battery Trickle Chargers
Solar Panel

Charges 12V batteries with the power of the sun. Works with boats, SUVs, RVs, electric fences and deer feeders and is weatherproof. Plugs into 12V DC plug or directly to battery. Four pre-drilled holes for easy installation. Maintenance free and comes with built in overcharge/discharge protection. Works in all daylight conditions. Includes four stainless steel screws, 9-1/2 ft. wire, 12V DC plug, battery clamps and quick connect technology.

Mfg. No.	Order No.	Volts	Max Output	Dim. In. L x W x H
50022	SUN50022	12	5 Watts	18 x 1-1/2 x 14-1/2

Charger Controllers
Solar Panel

Designed to protect batteries from overcharges and discharges. For use with 12V solar panels and batteries only. Handles up to 10 Amps of current and up to 150 Watts of Solar Power. Maintenance free protection for your solar panels and batteries. Can be panel or wall mounted. LCD digital display shows battery's voltage for easy monitoring.

LEDs indicate charging status:
RED LED: solar power indication
GREEN LED: charging is completed
BLUE LED: charging is maintained

Mfg. No.	Order No.	Max. Amps	Max. Watts	Dim. In. L x W x H
60031	SUN60031	10	50	9-3/8 x 6-7/8 x 2-5/8

Power Inverters

VOL00480C

VOL00487C

Power inverters provide instant 115/120V AC power from your car, truck, boat, SUV, or RV. Features both AC and USB outlets. High surge capacity, high efficience, and thermal fan. Mounting brackets and cables included.
VOL00487C: LCD display for output power, input voltage, and error indication. Overload protection.

Mfg. No.	Order No.	Max. Cont. Power Watts	Peak Power Watts	No. AC Outlets
10-00479	VOL00479	750	1500	2
10-00480C	*VOL00480C	1000	2000	2
10-00481C	*VOL00481C	1500	3000	2
10-00483C	*VOL00483C	3000	6000	3
	Pure Sine Wave Inverter			
10-00487C	VOL00487C	2000	4000	2

*Remote control capability.

Power Inverters
12V DC Adapter

Plugs directly into a 12V adapter in your automobile, truck or RV. Provides instant 115V power to small devices like cell phones, MP3 players, laptops, and printers. Power plug adjusts up to 45°, one A/C outlet USB port, overload and short circuit protection with low battery shut down.

Mfg. No.	Order No.	Max. Cont. Power Watts	Peak Power Watts	No. AC Outlets
10-00474	VOL00474	100	200	1

Power Inverter Accessories
Remote Control

Remote control for 1000W – 3000W inverters. Features a battery, output, input/output, and battery low warning readers.

Mfg. No.	Order No.	Cable Lgth. Ft.
10-00486	VOL00486	20

ANCOR MARINE GRADE™ PRODUCTS
A Lasting Solution.

Ring Terminals
Heatshrink

Designed with heat activated adhesive built into tubing sleeve. Tinned copper for maximum current flow and corrosion resistance. Adhesive lined heat shrink tubing shrinks to form a tight seal and the ultimate in vibration and strain relief.

Mfg. No.	Order No.	Screw Size	Color	Pkg. Qty.
		22 – 18 AWG		
310303	ANR31830	8 – 10	Red	22
310325	ANR31105	8 – 10	Red	22
		16 – 14 AWG		
311303	ANR31308	#10	Red	3
311325	ANR31310	#10	Yellow	25
311403	ANR31628	#10	Blue	3
		12 – 10 AWG		
312303	ANR31608	#10	Yellow	3
312325	ANR31610	#10	Red	25
312403	ANR31625	#1/4	Yellow	3
312503	ANR31614	#5/16	Yellow	3

Ring Terminals
Nylon Insulated

Features double crimp, funnel entry and insulation grip. UL listed.

Mfg. No.	Order No.	Screw Size	Color	Pkg. Qty.
		8 AWG		
230234	ANR23210	#1/4	Red	2
		6 AWG		
230244	ANR23220	#1/4	Blue	1
230245	ANR23222	#5/16	Blue	1
		4 AWG		
230255	ANR23232	#5/16	Yellow	1
230256	ANR23234	#3/8	Yellow	1

ANCOR MARINE GRADE™ PRODUCTS
A Lasting Solution.

Disconnects
Heat Shrink

Designed with heat activated adhesive built into tubing sleeve. Provides vibration/strain relief and water tight seal. Tinned copper construction with brazed seam. Corrosion resistant. 3 per pkg. UL listed, CSA recognized.

Mfg No.	Order No.	Desc.	Wire Size AWG
316803	ANR31857	Female	22 to 18
316903	ANR31860	Male	22 to 18
317803	ANR31863	Female	16 to 14
317903	ANR31866	Male	16 to 14

Butt Connectors
Heat Shrink



Designed with heat activated adhesive built into tubing sleeve. Provides vibration/strain relief and water tight seal. Tinned copper construction with brazed seam. Corrosion resistant. UL listed, CSA recognized.

Mfg No.	Order No.	Wire Size AWG
309025	ANR30342	22 to 18
309125	ANR30786	22 to 18
309003	ANR30568	16 to 14
309103	ANR30792	16 to 14
309203	ANR30798	12 to 10
309225	ANR30800	12 to 10

GB Gardner Bender

Ring Terminals
Insulated

Clamshell packaging.

Mfg. No.	Order No.	Stud Size	Color	Pkg. Qty.
		22 – 18 AWG		
20-102	GAB05026	8 – 10	Red	22
		16 – 14 AWG		
20-103	GAB04998	4 – 6	Blue	22
20-104	GAB04999	8 – 10	Blue	22
20-105	GAB05000	12 – 1/4	Blue	17
		12 – 10 AWG		
20-106	GAB05001	8 – 10	Yellow	14
20-107	GAB05002	12 – 1/4	Yellow	14
20-108	GAB05003	1/4 – 3/8	Yellow	14

Spade Terminals
Insulated

Clamshell packaging.

Mfg. No.	Order No.	AWG	Stud Size	Color	Pkg. Qty.
20-111	GAB05004	22 – 18	4 – 6	Red	10
20-113	GAB05005	16 – 14	4 – 6	Blue	20
20-114	GAB05006	16 – 14	8 – 10	Blue	20
20-116	GAB05007	12 – 10	8 – 10	Yellow	14

Wire Disconnects
Insulated

GAB05013 GAB05016

Mfg. No.	Order No.	Type	Color	Pkg. Qty.
		22 – 18 AWG		
20-141F	GAB05011	Female	Red	21
20-141M	GAB05012	Male	Red	18
		16 – 14 AWG		
20-143F	GAB05013	Female	Blue	20
20-143M	GAB05014	Male	Blue	18
		12 – 10 AWG		
20-145M	GAB05016	Male	Yellow	16
20-145F	GAB05015	Female	Yellow	16

GHD Order Desk
(907) 279-6691
1-800-478-4393
ORDER ONLINE TODAY — SHIPS OUT TOMORROW!
www.ghdalaska.com
2192 VIKING DRIVE
ANCHORAGE, AK 99501
GENERAL HARDWARE DISTRIBUTORS

Butt Splices

Rated at 600 Volt Max. Temperature rating: 167 °F. Clamshell packaging.

Mfg. No.	Order No.	AWG	Color	Pkg. Qty.
10121	GAB10121	22 – 18	Red	100
20-121	GAB05008	22 – 18	Red	22
10123	GAB10123	16 – 14	Blue	100
20-123	GAB05009	16 – 14	Blue	21
10126	GAB10126	12 – 10	Yellow	100
20-126	GAB05010	12 – 10	Yellow	10

Tap Splices



GAB04997

GAB05041

GAB05042

Secure connections without stripping wire. Rated at 600 Volt Max. Temperature rating: 221 °F.

Mfg. No.	Order No.	AWG	Color	Pkg. Qty.
10100	GAB10100	16 – 14	Blue	25
20-100	GAB04997	16 – 14	Blue	5
20-2218	GAB05041	22 – 18	Red	5
20-1210	GAB05042	12–10	Yellow	3

Wire/Cable Staples
Romex®

Steel Romex® staple secures Romex® wire and other types of non-metallic (NM) cable. Recessed head drives faster and protects cable insulation. Pointed legs drive in straight; will not split wood. Preferred length. Virtually "oil-free" for cleaner handling with sharper tips for easy starting.

Mfg. No.	Order No.	Dim. In.	Pkg. Qty.
MS-175	GAB65175	9/16	100

Pigtail Connectors
Closed End — Crimped

For use with solid or stranded wire. Tin-plated copper construction; resists chemicals and corrosion. UL listed, CSA certified.

Mfg. No.	Order No.	Wire Size AWG
20-089	GAB04996	22 to 14
20-090	GAB05024	22 to 12

Wire Connectors
WingGard™ — Twist-On

Easily gripped wing type design. Fits #22 - #10 AWG wires. Square-wire plated spring adjusts to size and shape of splice. Heat resistant up to 221°F. For use with copper to copper connections only. UL and CSA listed.

Mfg. No.	Order No.	Wire Range AWG	Desc.
25-084	GAB00260	#22 – #10	25 Yellow w/ resealable bag
25-086	GAB00262	#18 – #10	25 Red w/ resealable bag

Wire Connectors
GreenGard™ — Grounding

For positive ground connections. Wing type design for easy application and removal. Fits #10 – #14 AWG wires. Corrosion resistant. Flame retardant thermoplastic shell. UL and CSA listed.

Mfg. No.	Order No.	Desc.
25-095	GAB03189	25 Green w/ resealable bag

Wire Connectors
WireGard™ — Screw-On

Square wire spring secures splice quickly. Resistant to atmospheric contaminants. Heat resistant up to 221°F. Copper to copper connections only. UL and CSA listed.

Mfg. No.	Order No.	Desc.
10-003	GAB10003	100 Orange, boxed
25-003	GAB00251	25 Orange w/ resealable bag

Electricians' Screw Kits

Assorted sizes and lengths of commonly used electrical machine screws. Slotted round-head screws for switches, receptacles, and outlet applications, and slotted flat-head screws for all-purpose electrical fastening. Includes 1/2, 3/4, 1, 1-1/4, 1-1/2 and 2" machine screws plus white, ivory, and almond wall plate screws.

Mfg. No.	Order No.	Desc.
SK-832WP	GAB06328	135-Pc. 8-32 round screw kit

Wire Stripper/Crimpers
Combination Kit

Insulated terminal and stripping/crimping tool kit with multi-functional tool. Includes 11-compartment reclosable storage case.

Kit Contents

Desc.	Wire Range AWG	Pkg. Qty.
GS-66 Multi-use stripper	–	1
Butt splice	22 – 18	10
Butt splice	16 – 14	10
Butt splice	12 – 10	6
Ring terminal	22 – 18	10
Ring terminal	16 – 14	10
Ring terminal	12 – 10	4
Female bullet splice	16 – 14	5
Male bullet splice	16 – 14	5
Pigtail connector	22 – 18	5
Pigtail connector	16 – 14	3
Pigtail connector	12 – 10	1
Spade terminal	22 – 18	10
Spade terminal	16 – 14	10
Female disconnect	16 – 14	5
Male disconnect	16 – 14	5

Stripper/Crimper Kits

Mfg. No.	Order No.	Desc.
GK15N	GAB07173	100 piece terminal stripper & crimper kit

Electrical Repair Kits
Multi-Use

For use on automotive, marine, industrial and agricultural applications. Two-part plastic case folds open 180° for easy access to both sides of kit

Mfg. No.	Order No.	Desc.
W5207	WIM15907	285 Pc. multi-use electrical repair kit

Nylon Electrical Kits
Assortment

Contains: connectors, assorted butts; rings, spade and male; female disconnects (18–10 AWG). Nylon Insulated with insulation grip. Double crimp, funnel entry. 120 assorted pieces.

Mfg. No.	Order No.	Desc.
220003	ANR22847	120-Pc. Asst. nylon electrical connector kit

Terminals & Disconnects
Assorted Kit

Kit Contents

Desc.	Wire Range AWG	Pkg. Qty.
Butt splice	22 – 18	5
Butt splice	16 – 14	4
Butt splice	12 – 10	3
Ring terminal	22 – 18	6
Ring terminal	16 – 14	4
Spade terminal	22 – 18	5
Spade terminal	12 – 10	3
Female disconnect	22 – 16	5
Female disconnect	16 – 14	5

Terminal & Disconnect Kits

Mfg. No.	Order No.	Desc.
TK40	GAB03873	40-Pc. terminal & disconnect kit

Wire Connector Sets
WireGard™

Square wire spring secures splice quickly. Thermoplastic shell shields against environmental extremes.

Set Contents

Pkg. Qty.	Desc.	Wire Range AWG
10	GB-1 Connectors	#22 – #16
8	GB-2 Connectors	#22 – #16
6	GB-3 Connectors	#22 – #14
2	GB-4 Connectors	#18 – #10
4	Crimp connectors	#22 – #14
2	Crimp connectors	#22 – #16

Wire Connector Sets

Mfg. No.	Order No.	Desc.
TK32	GAB03874	32 Assorted wire connectors

Alligator Clips
Multi-Purpose

Multi-purpose alligator clips for home, auto and marine applications. Features insulated barrel. Two per package, one black, one red.

Mfg. No.	Order No.	For Wire Size AWG	Lgth. In.
14-077	GAB14077	22 to 14	2

GHD Order Desk
(907) 279-6691
1-800-478-4393

ORDER ONLINE TODAY — SHIPS OUT TOMORROW!
www.ghdalaska.com

2192 VIKING DRIVE
ANCHORAGE, AK 99501

GENERAL HARDWARE DISTRIBUTORS

Battery Clamps
Insulated

For use with battery chargers and testing equipment. Features copper-clad clamp with color-coded handles. Pair (red and black).

Mfg. No.	Order No.	Amps
14-610	GAB14610	10

Rocker Switches
Lighted



Heavy duty rocker switch fits .830" x 1.45" panel cutouts. On/Off toggle switch. Red lighted. Rating 3/4 HP, 125 – 250V AC. Frame and rocker are black glass-filled nylon.

Mfg. No.	Order No.	Desc.
GSW-49	GAB04297	Lighted rocker switch

Toggle Switches

Multiple switch configurations. For use in industrial, automotive or emergency lighting applications. UL and CSA listed.

Mfg. No.	Order No.	Type	Amps
GSW11*	GAB89011	SPST	10/20
GSxW14	GAB89014	DPST	10/20
GSW16	GAB89016	DPDT	10/20
GSW18	GAB89018	SPST	8/4/10

* Includes ON/OFF faceplate.

Cable Organizers
Split-Flex Tubing

For protecting and organizing wires and cables. Corrugated polyethylene construction. Split lengthwise for easy cable insertion. Black.

Mfg. No.	Order No.	Lgth. Ft.	ID In.
FLX-3810	GAB89100	10	3/8
FLX-5007	GAB89101	7	1/2

Spiral Hose Wrap

TECEL376 TECEL500 TECEL628 TECEL755 TECEL1004

For wrapping, protecting and bundling wires, brake and hydraulic lines. Excellent for computer, telephone, automotive, and marine uses. Easy to install for complete wire management. Non-conductive material.

Mfg. No.	Order No.	Range In.	Overall Dia. In.	Wall In.
EL376	TECEL376	5/16 – 3	3/8	.052
EL500	TECEL500	3/8 – 4	1/2	.062
EL628	TECEL628	5/8 – 4-1/2	5/8	.062
EL755	TECEL755	3/4 – 5	3/4	.065
EL1004	TECEL1004	1 – 7	1	.095

Cable Clamps
Nylon

Provides shock absorption and reduces noise. Features screw hole alignment for fast installation. Natural color. Solvent, oil, acid and moisture resistant. UL listed. 25 per pkg.

Mfg No.	Order No.	Nom. Dia. In.
401252	ANR40084	1/4
401312	ANR40122	5/16
401372	ANR40172	3/8
401502	ANR40238	1/2
401622	ANR40274	5/8
401752	ANR40312	3/4
401892	ANR40388	1

Cable Clamps
Plastic



For construction, maintenance and assembly line uses. Usable temperature range -66°F to 340°F.

		Dim. In.				
Mfg. No.	Order No.	A	B	C	D	E
PPC1525	GAB55525	1/4	25/64	1/32	3/64	3/8
PPC1538	GAB55538	3/8	31/64	1/32	3/64	3/8
PPC1550	GAB55550	1/2	35/64	3/64	3/64	3/8
PPC1575	GAB55575	3/4	3/64	3/32	3/64	1/2

ANCOR
MARINE GRADE™ PRODUCTS
A Lasting Solution.

Wire Spools
Marine Grade™

Manufactured from tinned copper stranding for corrosion and electrolysis protection. Vinyl insulation resists salt water, battery acid, oil, gas and ultra-violet radiation. Remains flexible in extreme conditions. Heat and abrasion resistant. Rated 600 Volts, 105°C dry, 75°C wet. Spool. UL listed.

Mfg No.	Order No.	Lgth. Ft.	Color
	18 AWG – 7/64" Nom. OD		
180003	ANR18002	35	Black
180803	ANR18018	35	Red
180903	ANR18020	35	White
	16 AWG – 1/8" Nom. OD		
182003	ANR18146	25	Black
182803	ANR18162	25	Red
182903	ANR18164	25	White
	14 AWG – 9/64" Nom. OD		
184003	ANR18288	18	Black
184303	ANR18294	18	Green
184803	ANR18304	18	Red
184903	ANR18306	18	White
185003	ANR18308	18	Yellow
	10 AWG – 7/32" Nom. OD		
108002	ANR10833	25	Black
108802	ANR10865	25	Red

GB
Gardner Bender

Wire Spools

For home, auto and marine electrical applications.

Mfg. No.	Order No.	Lgth. Ft.	AWG	Color
AMW-314	GAB05304	18	14	Black
AMW-316	GAB05303	25	16	Black
AMW-318	GAB05302	35	18	Black
AMW-334	GAB05314	18	14	White
AMW-336	GAB05313	25	16	White
AMW-338	GAB05312	35	18	White
AMW-324	GAB05309	18	14	Red
AMW-326	GAB05308	25	16	Red
AMW-328	GAB05307	35	18	Red

3M

Cable Ties

Used to secure wire bundles and harness components quickly. Flexible design allows ties to slip easily under and around cables and harnesses. Ties can be used with most standard tensioning/cutoff tools for fast production line fastening.100 per package.

Mfg. No.	Order No.	Lgth. In.	Max. Dia. In.	Tensile Strength Lbs.
	Natural Color			
CT6NT40-C/59286	MMM59286	6	1.25	40
CT8NT50-C/59297	MMM59297	8	1.8	50
CT11NT50C/59302	MMM59302	11	3.2	50
	Black Color			
CT6BK40-C/59284	MMM59284	6	1.25	40

Cable Ties
Weather-Resistant

Black. 50-lb. tensile strength. 0.18" width, 0.05" thickness.

Mfg. No.	Order No.	Lgth. In.	Max. Dia. In.
CT8BK50-C/59293	MMM59293	8	1.9
CT11BK50C/59300	MMM59300	11	3.1
CT15BK50C/59304	MMM59304	15	4.1

Cable Ties
Mounting

Threaded hole in end for use with #10 screw. 50-lb. tensile strength. 0.18" width, 0.06" thickness.

Mfg. No.	Order No.	Lgth. In.	Max. Dia. In.	Pkg. Qty.
CT8NT50SC/59296	MMM59296	8	1.8	100

PRO TIE

Cable Ties

High strength and lightweight UV black 6/6 nylon construction. It is a hygroscopic material that absorbs and releases moisture, is non-toxic and has working temperature range of -40° to 185° F.
Note: UV Black cable ties are UV stabilized for outdoor use.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
	Ultra Light Duty — 18-lbs. Tensile Strength			
N4ULD100	PTI00010	Natural	4	100
B4ULD100	PTI00014	UV Black	4	100
	Light Duty — 40-lbs. Tensile Strength			
N5LD100	PTI00054	Natural	5.7	100
B5LD100	PTI00058	UV Black	5.7	100
	Standard Duty — 50-lbs. Tensile Strength			
N8SD100	PTI00080	Natural	8	100
B8SD100	PTI00084	UV Black	8	100
RD8SD100	PTI00090	Red	8	100
AC8SD100	PTI00098	Asst	8	100
N11SD100	PTI00106	Natural	11.8	100
B11SD100	PTI00110	UV Black	11.8	100
RD11SD100	PTI00114	Red	11.8	100
AC11SD100	PTI00122	Asst	11.8	100
N14SD100	PTI00138	Natural	14.6	100
B14SD100	PTI00142	UV Black	14.6	100
RD14SD100	PTI00150	Red	14.6	100
AC14SD100	PTI00158	Asst	14.6	100
	Heavy Duty — 120-lbs. Tensile Strength			
N8HD100	PTI00180	Natural	7.9	100
B8HD100	PTI00184	UV Black	7.9	100
N11HD100	PTI00190	Natural	11.9	100
B11HD100	PTI00192	UV Black	11.9	100
N14HD100	PTI00195	Natural	14.5	100
BHD100	PTI00197	UV Black	14.5	100
	Extra Heavy Duty — 175-lbs. Tensile Strength			
B17EHD50	PTI00207	UV Black	17	50
B24EHD50	PTI00220	UV Black	24.9	50
B36EHD10	PTI00226	UV Black	36.5	10
	Super Heavy Duty — 250-lbs. Tensile Strength			
B36EHD10	PTI00250	UV Black	22	25

Cable Ties
Double Head

High strength and lightweight UV black 6/6 nylon construction. It is a hygroscopic material that absorbs and releases moisture, is non-toxic and has working temperature range of -40° to 185° F. Double head ties are designed to harness two cables simultaneously or a second loop acts as a positioning device for a single cable. Features 50-lbs. tensile strength for first loop and 40-lbs. tensile strength for second loop.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
B8SDDH25	PTI00357	UV Black	8.25	25
B15SDDH25	PTI00365	UV Black	15.5	25

PRO TIE

Cable Ties
Screw Mount

High strength and lightweight UV black 6/6 nylon construction. Hygroscopic material absorbs and releases moisture, is non-toxic and has working temperature range of -40° to 185° F. Use wood, sheet metal or concrete screw to fasten bundles directly to walls, panels, automotive chassis or any other surface.
Standard Duty: Features 50-lbs. tensile strength. Uses #8 or #10 screws.
Heavy Duty: Features 120-lbs. tensile strength. Uses #10 screws.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
		Standard Duty		
N8SDSM100	PTI00276	Natural	8	100
B8SDSM100	PTI00278	UV Black	8	100
		Heavy Duty		
N15HDSM100	PTI00290	Natural	15	100
B15HDSM100	PTI00292	UV Black	15	100

Cable Ties
Hook and Loop

Constructed of black 1/2" wide laminated hook and loop material. Hook on one side and loop on the other. Perfect for applications that need to be changed frequently.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
BHL6	PTI00420	Black	6	10
BHL12	PTI00424	Black	10	10

Cable Ties
Horizontal ID

High strength and lightweight UV black 6/6 nylon construction. Hygroscopic material absorbs and releases moisture, is non-toxic and has working temperature range of -40° to 185° F. Horizontal tab identifies particular bundles of wires, looms or various items. 0.3" x 0.8" tab size. 18-lbs. tensile strength.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
N4HID100	PTI00300	Natural	4.3	100

Cable Ties
Stainless Steel

316 Marine Grade stainless steel construction. Resistant to corrosion, abrasion, vibration and temperature extremes. Operating temperature range of -80° to 1000° F. Low profile ball lock not suitable for high pressure applications. 100-lbs. tensile strength.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
SS8N5	PTI00480	7.9	5
SS14N5	PTI00484	14.2	5
SS20N5	PTI00486	20.4	5

PRO TIE

Cable Ties
Stainless Steel Pawl

High strength and lightweight UV black 6/6 nylon construction. It is a hygroscopic material that absorbs and releases moisture, is non-toxic and has working temperature range of -40° to 185° F. Stainless steel pawls provide increased strength and security locking points for precise adjustments. Features 50-lbs. tensile strength.

Mfg. No.	Order No.	Color	Lgth. In.	Pkg. Qty.
B7SSP50	PTI00328	UV Black	7.3	50
B11SSP50	PTI00330	UV Black	11.4	50
B14SSP50	PTI00332	UV Black	14	50

Cable Tie Mounts



Use to anchor cable ties to eliminate cable tangles and clutter. Either peel and stick to surface or use #6 – #8 screw to mount. Adhesive backing allows routing of wires and cables where mounting holes cannot be drilled. Mounts take up very little room with its low profile design 4-way cable tie entry makes installation fast and easy For use with 18 – 50-lb. cable ties.

Mfg. No.	Order No.	Color	Size In.	Pkg. Qty.
N1PSSM100	PTI00404	Natural	1	100
B1PSSM100	PTI00406	Black	1	100

Tensioning Tools
Cable Ties

Economical tool for tension adjustment and cutting of 18 to 50-lb. nylon cable ties up to .19" wide.

Mfg. No.	Order No.	Desc.
TTN1850	PTI00380	Tensioning tool for nylon cable ties

Performance Tool

Cable Tie Assortments
1000 Piece

Features 4 color-coded lengths. Includes (500) 4", (100) 6", (300) 8" and (100) 12" ties. Assorted colors, yellow, blue, red, green and white.

Mfg. No.	Order No.	Desc.
W2925	WIM13925	1000-Pc. cable tie assortment

Cable Tie Mounting Bases

For use with 18-lb., 45-lb. and 50-lb. cable ties. For securing wire or cable bundles; four-sided design allows ties to be inserted from any angle. Nylon 6/6 construction. Adhesive-backed with center screw hole for additional security. Natural color. 100 per pkg.

Mfg. No.	Order No.	Dim. In.	Fits Tie Width In.
MB-20	GAB49200	1 x 1	.10 to .17

GB Gardner Bender

Cable Tie Tensioning Tools

Trigger control applies proper tension; twist to snap off excess length. Compact design stores easily. For use with cable ties up to 75 lb. tensile strength.

Mfg. No.	Order No.	Desc.
CTT-45	GAB49045	Tensioning tool

Heat Shrink Tubing

Polyolefin tubing for wire insulation. 2 to 1 shrink rate. 4" length.

Mfg. No.	Order No.	Wire Range AWG	For Wire Dia. In.	Pkg. Qty.
HST125	GAB56125	#22 – #18	1/16	7
HST187	GAB55187	#20 – #12	3/32	8
HST250	GAB56250	#18 – #10	1/8	6

Heat Shrink Tubing
Assorted Set

Polyolefin tubing for wire insulation, repairing cords or covering tool handles.

Set Contents

No.	Desc.	Pkg. Qty.
HST-125	1/8" shrinks to 1/16"	4
HST-187	3/16" shrinks to 3/32"	2
HST-250	1/4" shrinks to 1/8"	2

Tubing Assortment Sets

Mfg. No.	Order No.	Desc.
HST-AST	GAB56900	8 Piece tubing assortment

Heat Shrink Tubing
PVC

For general purpose use. Continuous operating temperature: -22°F to 220°F. Shrink temperature: 230°F. Measures 8 ft. in length. Flame retardant. UL listed, CSA certified.

Mfg. No.	Order No.	Inside Dia. In. Before	Inside Dia. In. Finished	Color
HST-100	GAB05959	3/16	3/32	Red
HST-101	GAB05960	1/4	1/8	Blue
HST-102	GAB05961	5/16	5/32	Yellow

Digital Multimeters
Electrical – True-rms

Compact design for "go/no-go" testing. Measures voltage, resistance, and continuity. Prevents false readings caused by ghost voltage. Features automatic AC/DC voltage selection, large LED backlight, and Min/Max/Average to record signal fluctuations. CAT III 600V safety rated. Includes holster, battery, test leads and manual.

Mfg. No.	Order No.	Range AC/DC	Range Ohms	Dim. In.
2538783/114	FLK32417	to 600	to 600	6.57 x 3.31 x 1.82

Multimeters
Electrician's

VoltAlert™ technology for non-contact voltage detection. AutoVolt automatic AC/DC voltage selection. Low input impedance helps prevent false readings due to ghost voltage. Large white LED backlight for work in poorly lit areas. True-rms for accurate measurements on non-linear loads. CAT III 600V safety rated.

Mfg. No.	Order No.	Range AC/DC	Range Ohms	Dim. In.
2538815	FLK32420	to 600	to 600	6.57 x 3.31 x 1.82

Electricians' Kits

Includes 117 digital multimeter with non-contact voltage detection, clamp meter, hard point test lead set, magnetic meter hanging strap and case.

Mfg. No.	Order No.	Desc.
2583702	FLK34489	Electrician's combo kit

Test Lead Sets
Hard Point™

For general purpose measurements. Features comfort grip probes with 48" PVC insulated test leads and right-angle shrouded banana plugs. CAT IV 600 V, CAT III 1000 V, 10 A rating. UL listed.

Mfg. No.	Order No.	Desc.
TL75	FLK01158	Hard Point™ test lead set

Test Lead Sets
Industrial — SureGrip™

Handy all-in-one SureGrip™ industrial test lead kit includes: SureGrip™ alligator clip set, insulated test probe set and silicone test lead set (right to right).

Mfg. No.	Order No.	Desc.
TL220	FLK20645	SureGrip™ industrial test lead set

Alligator Clip Sets

Slide-on alligator clips (red, black) with 8 mm jaws opening. CAT IV 600 V, CAT III 1000 V, 10 A rating. UL listed

Mfg. No.	Order No.	Colors
AC72/1670095	FLK13321	Red and black

KLEIN TOOLS

Multimeters
Manual

KLN69150

KLN69151

KLN69152

Battery test function, measures AC/DC voltage, has data hold, integral lead storage and a category III rating. Includes test leads and 9V battery.
KLN69150: Battery test function. Measures AC/DC voltage - 600V. Measures DC current - 10A. Includes test leads and battery.
KLN69151: Auto ranging voltage. Backlit display. Measures AC/DC Voltage - 600V. Measures AC/DC Current- 10A. Measures capacitance, temperature and frequency. DC Current - 10A. Includes thermocouple, test leads and battery.
KLN69152: Auto ranging voltage measurement. Backlit display. Analog bar graph. Measures AC/DC Voltage - 1000V. Measures AC/DC Current - 10A. Includes thermocouple, test leads and battery.

Mfg. No.	Order No.	No. of Ranges	Max. Voltage	Depth In.
MM100	KLN69150	18	600	3.5
MM200	KLN69151	35	600	3.5
MM1000	KLN69152	28	1000	4

GREENLEE

Digital Multimeters
Manual Ranging

For testing 1.5V and 9V batteries and measuring voltage and current of small circuits. Measures AC/DC voltage, DC amperage, resistance and continuity. Features audible continuity and diode test indicators. Includes elastomer boot to protect meter from damage and built-in test leads. CAT II 300 V rated.

Mfg. No.	Order No.	Measurement Ranges	
		Volts	Amps
12037/DM-20	GRL12037	300	200 mA

Electrical Kits
Basic

Basic electrical kit for safe, non-contact voltage detection and is perfect for doing simple electrical projects or home remodeling.
Kit Includes:
DM-20 Manual Ranging Multimeter for measuring voltage and checking batteries
GT-11 Non-contact Voltage Detector for detecting voltage in outlets and wires and **GT-10 Polarity Cube** for troubleshooting 120V AC grounded outlets.
Also comes with durable carrying case.

Mfg. No.	Order No.	Desc.
TK-30/12127	GRL12127	Basic electrical kit

FLUKE.

Electrical Testers
OpenJaw™

Checks voltage, continuity and current. OpenJaw™ feature allows currents up to 100A to be checked without breaking circuit. Flexible, heavy duty test leads accept specialty tips and probes, stow in back of tester when not in use. Includes continuity beeper and low battery indicator. UL and CSA approved. Two-year warranty.

Measurement Ranges

DC Voltage	AC Current Volts	Continuity Ohms	Resist. Ohms
1000	600	<25	1000

Testers

Mfg. No.	Order No.	Range V AC	Overvoltage Rating Volts
T5-1000	FLK05311	1000	1000

KLEIN TOOLS

Clamp Meters

Features a large jaw size and work light to illuminate dark work spaces. Data hold captures measurements in any situation. Built-in magnetic mount allows for hands-free convenience. Includes case, test leads, and three AAA batteries.

Mfg. No.	Order No.	Volts Range AC/DC
CL100	KLN69200	To 600

KLEIN TOOLS

Fork Meters
Multifunction

Measures AC/DC voltage, AC current, resistance, capacitance, frequency, and duty cycle. Can also test diodes and continuity. Open jaw current measurement. With backlit display, test leads and 9V battery. Includes case.

Mfg. No.	Order No.	Jaw Opening In.
CL3000	KLN69204	1/2

Hook Meters

Hook-style meter features backlit digital LCD display and analog bar graph. Measures current up to 200 amps and has DC polarity indicator. Leads are interchangeable and can be stored in compartment on the device. Built-in work light helps illuminate darkened access terminals. Includes two AAA batteries.

Mfg. No.	Order No.	Jaw Opening In.	Dim. In.
CL3100	KLN69205	1/2	10-1/4 x 2-1/2 x 1-1/2

Milwaukee

Fluorescent Lighting Testers

Test lamps, ballasts and pins. 2-1/2 ft. fully retractable antenna with non-conductive sleeve for safe testing. Removable antenna adapter improves lamp test response. Visual and audible tool feedback to easily confirm testing. Features built-in LED flashlight, dial and buttons positioned for one-handed use.

Mfg. No.	Order No.	For Lamps
2210-20	MIL2210-20	T5, T8, T12

KLEIN TOOLS

VDV LAN Testers
LAN Scout™ Jr.

For testing twisted-pair data wiring (RJ45) connections. Large, digital LCD screen for easy identification. Dual-function button operates the test functions and the tone generator. Self-storing remote for convenience. Low-battery indicator activates when power is running out. Auto shutoff provides long battery life by conserving power. Batteries included.

Mfg. No.	Order No.	Battery	Battery Qty.
VDV526-052	KLN58084	6V alkaline (LR44)	4

FLUKE.

Voltage Testers
VoltAlert™

Indicator tip glows red on contact with an energized line. Constructed of injection-molded PVC and ABS. Impact-resistant.

Mfg. No.	Order No.	Dim. In. Lgth. x Dia.	Range Volts AC
1AC-A1-II	FLK29078	5.75 x 0.75	90 – 600

KLEIN TOOLS

Voltage Testers
Non-Contact

Automatically detects and indicates low voltage (12-48V AC) and standard voltage (48-1000V AC). Non-contact detection of standard voltage in cables, cords, circuit breakers, lighting fixtures, switches, outlets and wires. High intensity, bright green LED indicates the tester is operational and aids in illuminating the workspace. Digitally controlled ON/OFF power button, auto power-off feature, low-battery indicator, and convenient pocket clip. 2 AAA Batteries Included.

Mfg. No.	Order No.	Dim. In. Lgth. x Dia.	Range Volts AC
NCVT-2	KLN69002	5.5 x 1.0	12 – 1000

GREENLEE

Voltage Detectors
Volt Tick

For non-contact voltage detection at outlets, light fixtures, circuit breakers and wires. Can also locate breaks in wire. LED and audible alarm indicate presence of voltage. ON/OFF switch to conserve battery life. 1000V overload protection. UL, CUL and CE listed.

Mfg. No.	Order No.	Detection Range Volts	Frequency Range Hz
GT12/20947	GRL20947	50 – 1000	50 – 500

GB Gardner Bender

Voltage Detectors
Circuit Alert™ — Non-Contact

Visual and audible voltage indicators. Battery test feature. Batteries included. UL listed.

Mfg. No.	Order No.	Voltage Range
GVD-3504	GAB06840	50 – 600

KLEIN TOOLS

Voltage Testers
Wiggy®

Solid-state design for safety. LED display with automatic shutoff helps preserve batteries. Voltage indicated by lights, vibration and tone for a clear reading and without a battery. Low impedance to limit false readings. Includes three AAA alkaline batteries.

Mfg. No.	Order No.	Voltage Range
ET200	KLN69301	12 – 600

GB Gardner Bender

Voltage Testers
4-Way

Used for testing AC/DC voltage in outlets, panels, light fixtures, switches and circuit breakers. Lightweight design with insulated ABS housing. Features individual indicators for voltage ranges, twin flexible leads and pocket clip. ETL listed, CE certified.

Mfg. No.	Order No.	Lead Lgth. In.	Voltage Ranges
GET-3213	GAB06846	24	120, 240 and 277

Low Voltage Testers
Twin Probe

Features indicator glow when voltage is present and brightens as it increases, insulated alligator clip test leads and pocket clip. Dual insulated, durable ABS housing. Tests low volt outdoor lighting and control panels, doorbells, alarm systems and automotive 12V and 36V DC.

Mfg. No.	Order No.	AC/DC Volts	Lead Lgth. In.
GET-3202	GAB06868	5 – 50	5-1/2

FLUKE.

Infrared Thermometers
Mini

For locating heating and ventilating problems, checking status of electrical panels and diagnosing car malfunctions. Features 10:1 optics, single point offset laser sighting and comfortable ergonomic handle with protective rubber boot for added durability. Dual displays shows current and MAX measurements simultaneously with backlit display for poorly lit areas. Holds temperature readings for seven seconds. 12-hr. battery life.

Mfg. No.	Order No.	Accy. %	Meas. Range °F
62	FLK29112	±1.5	-20 to 932

KLEIN TOOLS

Thermometers
Infrared

Measures temperatures in diverse applications. 12:1 distance-to-spot ratio allows for quick checks of different types of environments such as hazardous, extreme temperature ranges or remote areas. LCD screen and backlight display. Locks measurement reading for later recording, or use Min/Max/Average/Differential to find the different temperature readings and auto shut off to maximize thermometer life. Two AAA-Alkaline batteries included.

Mfg. No.	Order No.	Temp. °F
IR1000	KLN69303	-58 – 1000

Performance Tool®

Thermometers
Infrared—Laser Pointer

Measures temperatures for home, auto or industrial use. Features easy-to-read backlit display, 8:1 distance-to-spot ratio, laser sighting, auto power shutoff and low battery indicator. 9 Volt battery included.

Mfg. No.	Order No.	Accy. %	Temp. Range °F
W89721	WIM07543	±2	-58 – 716

GB Gardner Bender

Multi-Purpose Wire Tracer
Lan Tracker™

Traces any unshielded and unenergized wire or cable. Four transmitter plug types encased inside closeable hatch: RJ-11, alligator clips, Coax, RJ-45, detects unshielded wires up to 12". LED intensifies as signal gets stronger. Requires 2-AA for transmitter and 3-1.5V LR-44 for receiver wand all included.

Mfg. No.	Order No.	Desc.
GET-4220K	GAB04958	Wire tracer

Continuity Testers

For use on non-energized circuits in extension cords, fuses, switches, water heater coils and low voltage wiring. Indicator bulb lights if continuity is detected. Features insulated test lead with alligator clip and pocket clip. Includes two AAA batteries.

Mfg. No.	Order No.	Lead Lgth. In.
GCT-3304	GAB06870	36

Receptacle Testers
Ground Fault

For use on any circuit protected by ground fault receptacle. Overloads circuit and trips GFCI for testing. Plug-in design with yellow and red lights for indicating circuit status. Features seven testing conditions: ground fault interruption, open ground, open neutral, open hot, hot/ground reverse, hot/neutral reverse, and correct wiring. ETL listed.

Mfg. No.	Order No.	Volts AC	Trip Range mA
GFI-3501	GAB06842	110 to 125	6 to 9

ZipWall Dust Barrier System

What's new at AIH

The ZipWall dust barrier system is for commercial and residential remodeling, asbestos abatement, mold remediation and more.

ZIPWALL®

www.zipwall.com

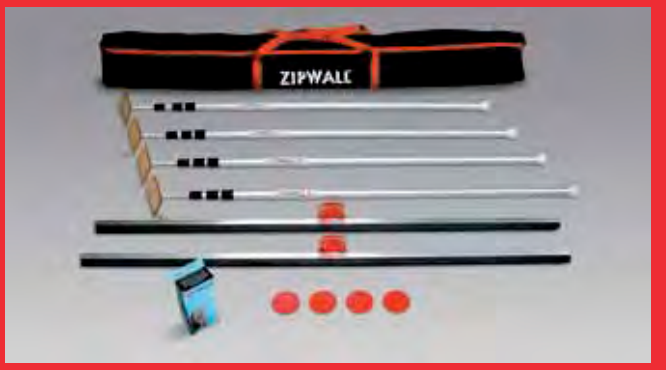

ZipWall® 4 Pack Plus Kit

The perfect starter kit. Create a dust barrier up to 30 feet long. Poles extend from 4' 7" to 12'.

Includes:
- Four 12' aluminum poles
- Four sets of parts
- Two 5' Foam Rail™ crossbars
- Two 7' Standard Zippers
- One Carry Bag

ZipWall® SLP Pole 2 Pack

Add to your ZipWall system. Aluminum Spring Loaded Poles extend from 4' 7" to 12'.

Includes:
- Two 12' aluminum poles
- Two sets of parts

Kit-20 2 Pack for ceilings up to 20' high

Includes:
- Two 20' aluminum poles
- Two sets of parts

Foam Rail™ crossbars

Includes:
- Two 5' Foam Rail™ crossbars
- Two T-Clip adaptors

Heavy Duty Zippers 2 Pack

Includes:
- Two 7' Heavy Duty adhesive zippers
- Two Flap Hooks to hold the door flap
- Patented Zipper Knife Sheeting Cutter

ALASKA INDUSTRIAL HARDWARE

Est. AIH 1959

ALASKA INDUSTRIAL HARDWARE

2192 Viking Dr.
Anchorage, AK 99501
Phone: (907) 276-7201
or (800) 478-7201
Fax: (907) 258-3054

2716 Commercial Dr.
Anchorage, AK 99501
Phone: (907) 272-1441
Fax: (907) 277-3552

751 West Parks Hwy.
Wasilla, AK 99654
Phone: (907) 376-5274
Fax: (907) 373-2443

5655 Old Seward Hwy.
Anchorage, AK 99518
Phone: (907) 561-1781
Fax: (907) 562-5312

2951 Airport Way
Fairbanks, AK 99709
Phone: (907) 452-4788
Fax: (907) 452-5387

193 Bridge Access Rd.
Kenai, AK 99611
Phone: (907) 283-3531
Fax: (907) 283-9333

12330 Old Glenn Hwy.
Eagle River, AK 99577
Phone: (907) 694-2988
Fax: (907) 694-1450

9141 Glacier Hwy. Ave.
Juneau, AK 99801
Phone: (907) 790-3300
Fax: (907) 790-5370